

NPRG860 - NPRG870

Automatic Synchronizer for Generator



NPRG860 & NPRG870 perform synchronization and paralleling of generators with electrical network. NPRG860 features a speed adjustment function. NPRG870 adds a voltage adjustment function. These two devices also include CB time compensation allowing paralleling without phase shift.

As well as the usual protection functions, NP800 relays provide monitoring, measurement and recording of the electrical quantities of the network.

The relays can be set by the RS232 port, or remotely using the RS485 port.

Reading, measurement and recording are all available locally or remotely.



- Multifunction
- Measurement
- Recording / event log
- Disturbance recording
- Local MMI

Common functions

- Regulating device [90]
- Synchrocheck for manual paralleling [25]
- Anticipated closing time of the paralleling circuit breaker [TA]
- Dead Busbar paralleling
- Adjustment of the phase shift between GE and BB measurements (Step up transformer adaptation)
- Network & Generator rated voltage

Speed adjustment (NPRG860-NPRG870)

- \pm speed order
- Boost pulsing
- "Black-start" mode

Voltage adjustment (NPRG870)

- \pm U order

Multi-groups management function (NPRG870)

- 4 settings tables available for management of 4 generators

OUR TRADEMARKS



TECHNIREL

GENERAL CHARACTERISTICS

Auxiliary Supply <ul style="list-style-type: none"> • Auxiliary supply ranges • Typical burden • Memory backup 	19 to 70 – 85 to 255 / Vdc or Vac 50 or 60 Hz 6 W (DC), 6 VA (AC) 72 hours
Analogue inputs <ul style="list-style-type: none"> • Phase voltage inputs 	Un: 55 to 120 V input impedance > 80 K Ω continuous rating 240 V, short duration withstand 275 V - 1 min measurement from 3 to 240 V VT setting: primary value from 100 V to 500 kV
<ul style="list-style-type: none"> • Frequency (50Hz or 60Hz) 	measurement: 30-70 Hz
Digital Inputs (4 for NPRG860, 8 for NPRG870) <ul style="list-style-type: none"> • Polarizing voltage • Level 0 • Level 1 • Burden 	20 to 70 Vdc for 19 to 70 V 37 to 140 Vdc for 85 to 255 V < 10 Vdc range 19 to 70 V – < 33 Vdc range 85 to 255 V > 20 Vdc range 19 to 70 V – > 37 Vdc range 85 to 255 V < 15 mA
Relay Outputs (3* for NPRG860 + 1 WD, 7 for NPRG870 + 1 WD) <ul style="list-style-type: none"> • Relays A*, B*, E, F : 	double contact NO, permanent current 8 A closing capacity 12 A / 4 s short circuit current withstand 100 A / 30 ms breaking capacity DC with L/R = 40 ms: 50W breaking capacity AC with cos φ = 0.4: 1,250 VA
<ul style="list-style-type: none"> • Relays C*, WD, D, G 	changeover contact, permanent current 16 A closing capacity 25 A / 4 s short circuit current withstand 250 A / 30 ms breaking capacity DC with L/R = 40 ms: 50 W breaking capacity AC with cos φ = 0.4: 1,250 VA
Characteristics of the function [90] <ul style="list-style-type: none"> • Accuracy of voltage measures • Setting of voltage difference: $\pm\Delta U$ • Voltage difference accuracy • Setting of angular difference: $\Delta\varphi$ • Angular difference accuracy • Setting of frequency difference: $\pm\Delta F$ • Frequency difference accuracy • Setting of rate of frequency change: $\Delta F/dt$ • Rate of frequency change accuracy • Threshold of amplitude U GE mini • Threshold accuracy • Closing time of the paralleling CB (TA) • Anticipatory max (limitation / TA) • Accuracy of the time delays • Accuracy of displayed measures 	3% of Un thresholds +/- : 1% to 15% Un, with step of 1% Un $\pm 5\%$ of the set value thresholds +/- : 1° to 20°, with step of 1° $\pm 2\%$ thresholds +/- : 0.01 to 1.5 Hz, with step of 0.01 Hz $\pm 2\%$ thresholds +/- : 0.01 to 0.2 Hz/s, with step of 0.01 Hz/s $\pm 2\%$ 50 to 100% Un, with step of 1% 2% of Un 0 ms to 600 ms, with step of 10 ms 1 to 20°, with step of 1° $\pm 2\%$ or 20 ms 3% from 3 to 240 V

GENERAL CHARACTERISTICS

Characteristics of the function [25] <ul style="list-style-type: none"> Accuracy of voltage measures Setting of voltage difference: $\pm \Delta U$ Voltage difference accuracy Setting of angular difference: $\Delta \varphi$ Angular difference accuracy Setting of frequency difference: $\pm \Delta F$ Frequency difference accuracy Setting of rate of frequency change: $\Delta F/dt$ Rate of frequency change accuracy Time lag before authorisation Accuracy of the time delays Accuracy of displayed measures 	3% of U_n thresholds \pm : 1% to 15% U_n , with step of 1% U_n \pm 5% of the set value thresholds \pm : 1° to 20°, with step of 1° \pm 2% thresholds \pm : 0.01 to 1.5 Hz, with step of 0.01 Hz \pm 2% thresholds \pm : 0.01 to 0.2 Hz/s, with step of 0.01 Hz/s \pm 2% 0 ms to 1 s, with step of 0.1 s \pm 2% or 20 ms 3% from 3 to 240 V
Adjustment of the phase shift between GE and BB measurements <ul style="list-style-type: none"> GE voltage / BB voltage 	0 to 360°, with step of 1°
Network rated voltage configuration <ul style="list-style-type: none"> Setting range 	100 V to 500kV
Speed adjustment (NPRG860/NPRG870) <ul style="list-style-type: none"> Interval of the pulses $\pm f$ Mini duration time of the pulses $\pm f$ Pulses width $\pm f$ Proportional gain (KFP^*) $\pm f$ Derivative gain for (KFD^{**}) $\pm f$ Boost pulsing time-delay Accuracy of the time delay Duration of the pulses $\pm f$ (boost pulsing) Orders stop if paralleling ok Mode time mini impulsion f <ul style="list-style-type: none"> *: 5 Hz correspond to 20 s ** : 1 Hz/s correspond to 200 s ** : 1 Hz/s correspond to 2 s 	0 to 250 s with step of 1 s 0.1 to 1 s, with step of 0.01 s 0 to 100% of interval of pulses $\pm f$, with step of 1% 0 to 200, with step of 1 0 to 100, with step of 1 10 to 200 s, with step of 1 s \pm 2% or 20 ms 0.01 to 2 s, with step of 0.5 s YES/NO Suppress / Add
Voltage adjustment (NPRG870) <ul style="list-style-type: none"> Interval of the pulses $\pm U$ Mini duration time of the pulses $\pm U$ Pulses width $\pm f$ Proportional gain (KUP^*) $\pm U$ <ul style="list-style-type: none"> *: 10% of U correspond to 5 s 	0 to 250 s, with step of 1 s 0 to 0.5 s, with step of 0.01 s 0 to 100% of interval of pulses $\pm U$, with step of 1% 0 to 100, with step of 1
Dead Busbar paralleling (NPRG870) <ul style="list-style-type: none"> Dead busbar paralleling enabled Info dead busbar paralleling enabled Busbar voltage detection threshold Threshold accuracy Setting of frequency difference Angular accuracy / frequency difference Setting of voltage difference Voltage difference accuracy Time lag before paralleling Accuracy of the time delay 	by dedicated DI or setting software HMI, dedicated DI, communication and setting software 10% to 50% U_n , with step of 1% U_n 2% of U_n thresholds $F<$ and $F>$: 0 to 1 Hz, with step of 0.1 Hz \pm 2% thresholds $U<$ and $U>$: 1 to 10% U_n , with step of 1% U_n \pm 5% of the set value 1 to 5 s, with step of 0.5 s \pm 2% or 20 ms




GENERAL CHARACTERISTICS

Digital inputs assignment <ul style="list-style-type: none"> • Input 1 • Input 2 • Input 3 • Input 4 • Input 5 (NPRG870 only) • Input 6 (NPRG870 only) • Input 7 (NPRG870 only) • Input 8 (NPRG870 only) 	paralleling of dead bus line auto mode order function enabled synchrocheck mode selection generator 1 selection generator 2 selection generator 3 selection generator 4
Digital output assignment <ul style="list-style-type: none"> • Relay A • Relay B • Relay C • Relay D (NPRG870 only) • Relay E (NPRG870 only) • Relay F (NPRG870 only) • Relay G (NPRG870 only) 	+f order - f order paralleling order generator selection fault +U order - U order paralleling of dead bus line enabled
Signalling LEDs assignment <ul style="list-style-type: none"> • LED 1 • LED 2 • LED 3 • LED 4 	auto mode activated paralleling of dead bus mode activated slip control paralleling order
Setting <ul style="list-style-type: none"> • Display • Configuration and operating software 	French, English, Spanish, Italian Windows® compatible 2000, XP, Vista and 7 French, English, Spanish, Italian
MODBUS® Communication (option) <ul style="list-style-type: none"> • Transmission • Interface • Transmission speed 	asynchronous series, 2 wires RS485 300 to 115,200 bauds
Disturbance recording <ul style="list-style-type: none"> • Number of recordings • Total duration • Pre fault time 	4 170 periods per recording (12 samples / cycle) adjustable from 0 to 170 cycles
Climatic withstand in operation <ul style="list-style-type: none"> • Cold exposure • Dry heat exposure • Damp heat exposure • Temperature variation with specified variation rate 	IEC / EN 60068-2-1: class Ad, -10 °C IEC / EN 60068-2-2: class Bd, +55 °C IEC / EN 60068-2-3: class Ca, 93 % HR, 40 °C, 56 days IEC / EN 60068-2-14: class Nb, -10 °C à +55 °C, 3 °C/min
Storage <ul style="list-style-type: none"> • Cold exposure • Dry heat exposure 	IEC / EN 60068-2-1: class Ad, -25 °C IEC / EN 60068-2-2: class Bd, +70 °C

GENERAL CHARACTERISTICS

Electrical safety <ul style="list-style-type: none"> • Ground bond test current • Impulse voltage withstand • Dielectric withstand (50Hz or 60Hz) • Insulation resistance • Clearance and creepage distances 	<p>IEC / EN 61010-1: 30 A</p> <p>IEC / EN 60255-5: 5 kV MC, 5 kV MD except outputs TOR, 1 kV MD except RS485, 3 kV MC</p> <p>IEC / EN 60255-5: common mode $2 \text{ kV}_{\text{rms}}$ – 1 min differential outputs mode TOR $1 \text{ kV}_{\text{rms}}$ – 1 min (open contact type)</p> <p>IEC / EN 60255-5: 500 Vcc - 1 s: > 100 MΩ</p> <p>IEC / EN 60255-5: rated insulation voltage: 250 V pollution degree: 2 overvoltage category: III</p>
Enclosure safety <ul style="list-style-type: none"> • Degree of protection provided by enclosures (IP code) 	<p>IEC / EN 60529: IP51, with front face</p>
Immunity – Conducted disturbances <ul style="list-style-type: none"> • Immunity to RF conducted disturbances • Fast transients • Oscillatory waves disturbance 1 MHz • Surge immunity • Supply interruptions 	<p>IEC / EN 61000-4-6: class III, 10 V</p> <p>IEC / EN 60255-22-4 / IEC / EN 61000-4-4: class IV</p> <p>IEC / EN 60255-22-1: class III, 2.5 kV MC, 1 kV MD except RS485, class II, 1 kV MC</p> <p>IEC / EN 61000-4-5: class III</p> <p>IEC / EN 60255-11: 100% 20 ms</p>
Immunity – Radiated disturbances <ul style="list-style-type: none"> • Immunity to RF radiated fields • Electrostatic discharges • Power frequency magnetic field and immunity test 	<p>IEC / EN 60255-22-3 /</p> <p>IEC / EN 61000-4-3: class III, 10 V/m</p> <p>IEC / EN 60255-22-2 /</p> <p>IEC / EN 61000-4-2: class III, 8 kV air / 6 kV contact</p> <p>IEC / EN 61000-4-8: class IV, 30 A/m permanent, 300 A/m 1 to 3 s</p>
Mechanical robustness - energised <ul style="list-style-type: none"> • Vibrations • Shocks 	<p>IEC / EN 60255-21-1: class 1 - 0.5 Gn</p> <p>IEC / EN 60255-21-2: class 1 - 5 Gn / 11 ms</p>
Mechanical robustness - not energised <ul style="list-style-type: none"> • Vibrations • Shocks • Bumps • Free falls 	<p>IEC / EN 60255-21-1: class 1 - 1 Gn</p> <p>IEC / EN 60255-21-2: class 1 - 15 Gn / 11 ms</p> <p>IEC / EN 60255-21-2: class 1 - 10 Gn / 16 ms</p> <p>IEC / EN 60068-2-32: class 1 - 250 mm</p>
Electromagnetic compatibility (EMC) <ul style="list-style-type: none"> • Radiated field emissivity • Conducted disturbance emissivity 	<p>EN 55022: class A</p> <p>EN 55022: class A</p>
Presentation <ul style="list-style-type: none"> • Height • Width • Brackets 19" rack mounting • Display 	<p>4U</p> <p>¼ 19"</p> <p>option (see drawing D37739)</p> <p>2 lines of 16 characters</p>
Case <ul style="list-style-type: none"> • H, W, D without connectors • Net weight 	<p>173 x 106.3 x 250 mm (see drawing D37739)</p> <p>3.6 kg</p>
Connection - codification <ul style="list-style-type: none"> • NPRG860 • NPRG870 	<p>see diagram S38894</p> <p>see diagram S38895</p>

SMARTsoft, integrated software for the Industry, Railway and Transmission ranges, helps the User get the best from NP800 series relays.

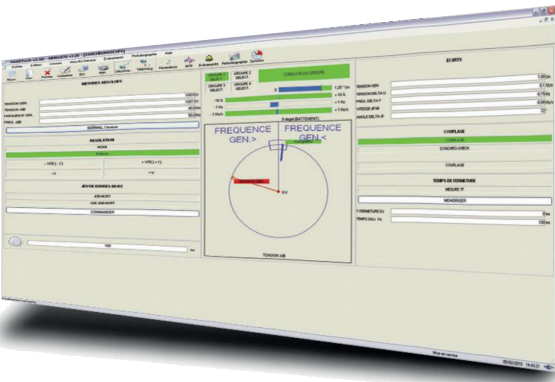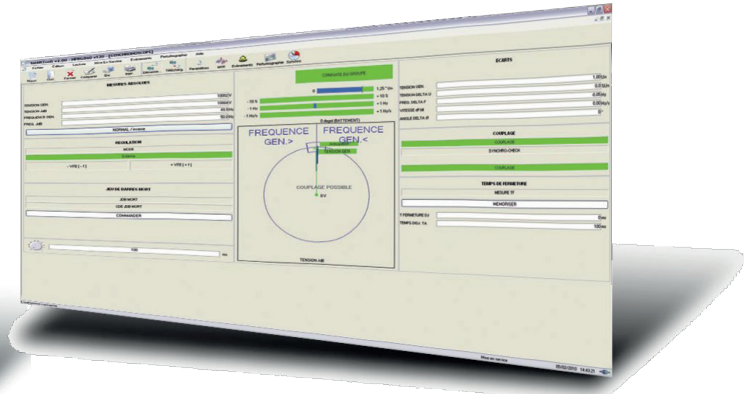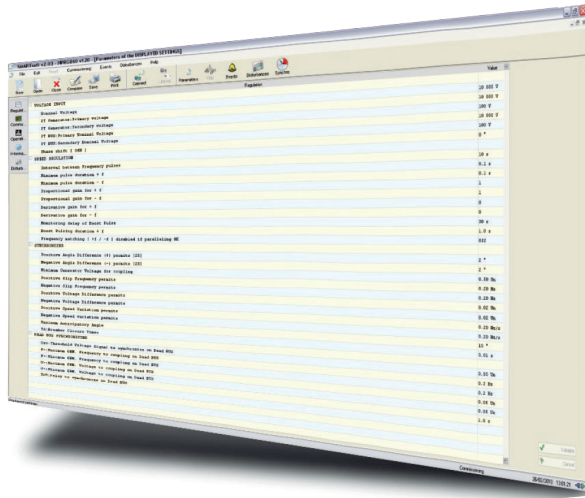

- User friendly
- Diagnosis
- Fault analysis
- Maintenance tools

FUNCTIONALITIES

- 2 ranges of auxiliary supply
- Storage of lack and the restoration of the auxiliary voltage (events recorded)
- Configuration and parameter setting by off-line / on-line PC
- Reading and recording of configuration by PC
- Measurement of electrical quantities:
 - Phase voltages UGE, UBB
 - Frequency FGE, FBB
 - Voltage difference ΔU (UGE - UBB)
 - Angular difference $\Delta \varphi$
 - Angular difference $\Delta \varphi$ compensate (NPRG870)
 - Frequency difference ΔF (FGE - FBB)
 - Rate of frequency change $\Delta F/dt$ (Hz / s)
 - CB closing time (ms)
 - Phi anticipatory ($^\circ$)
- Display expressed in primary values
- 4 setting groups for management of several selectable groups remotely by logical input (NPRG870 only)
- "Black-start" mode for starting with no speed
- Setting software compatible with Windows® 2000, XP, Vista and 7
- User interface with access to all functions
- Time stamping of internal events with 10ms resolution
- Time stamping of digital inputs with 10ms resolution
- Event recording: 250 locally recorded events, 200 saved in case of loss of the auxiliary supply
- Local / remote events acknowledgment


- Disturbance recording according to Comtrade format: storage of 4 recordings of 170 periods.
- Remote setting, remote reading of measurements, alarms and parameters settings
- Remote reading of disturbance recording and events log
- Self-diagnosis: Memories, output relays, A/D converters, auxiliary supply, cycles of execution of the software, hardware anomaly

Options

- Communication by Modbus® RS485
- Communication by Modbus® RS485 with redundancy (NPRG870 only)

FUNCTIONAL DIAGRAM

(For Synchrocheck and manual paralleling, Dead Busbar paralleling and Multi-groups management function, see NP800 application guide).

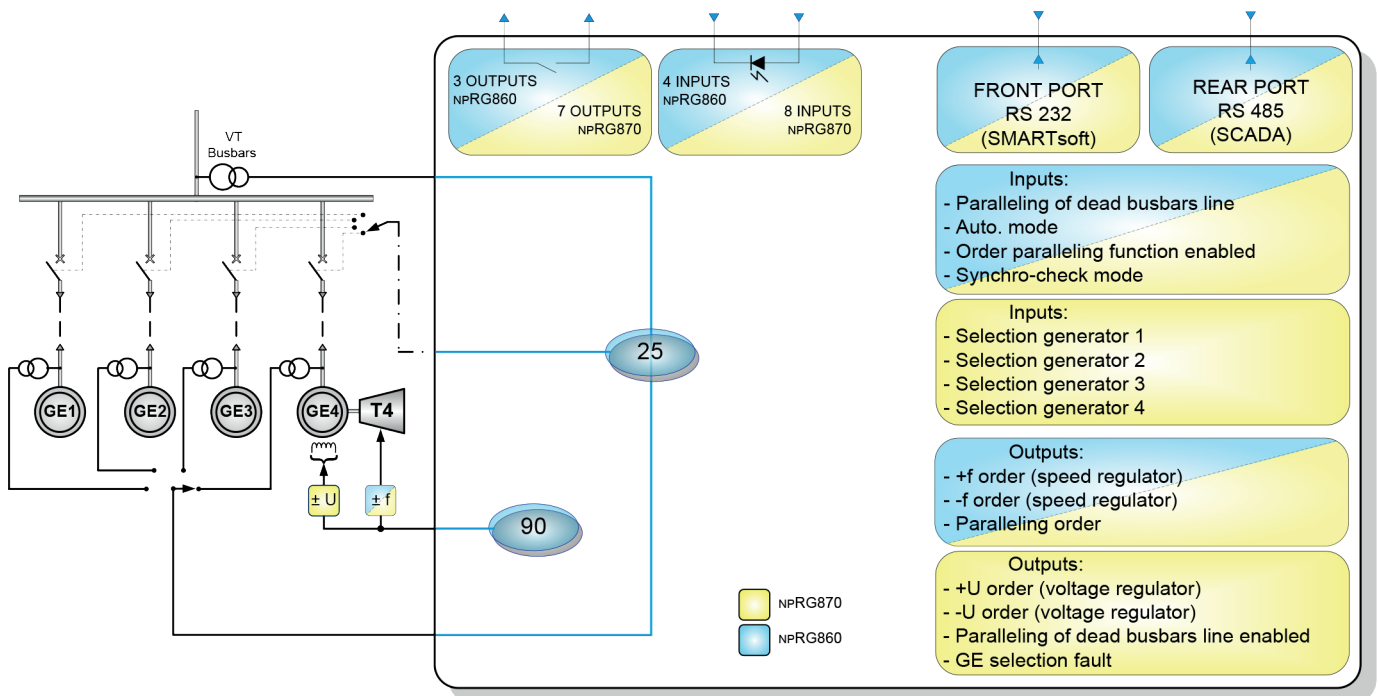

The specifications and drawings given are subject to change and are not binding unless confirmed by our specialists.

